


XINTONG GROUP SOLAR TRAFFIC LIGHT SOLUTION

Marketing Dept
2019
Version 1.0


Yangzhou Xintong Transport Equipment Group Co., Ltd



XINTONG

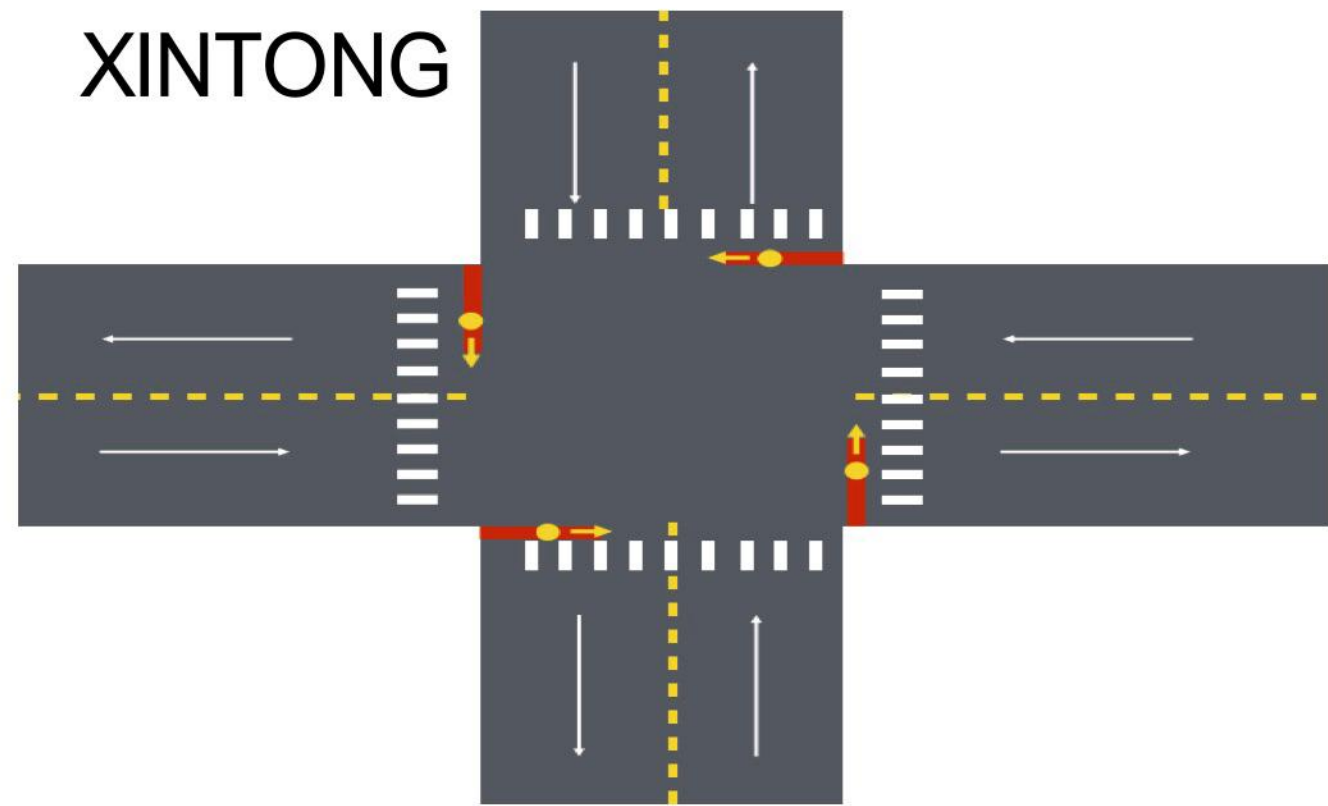

XINTONG

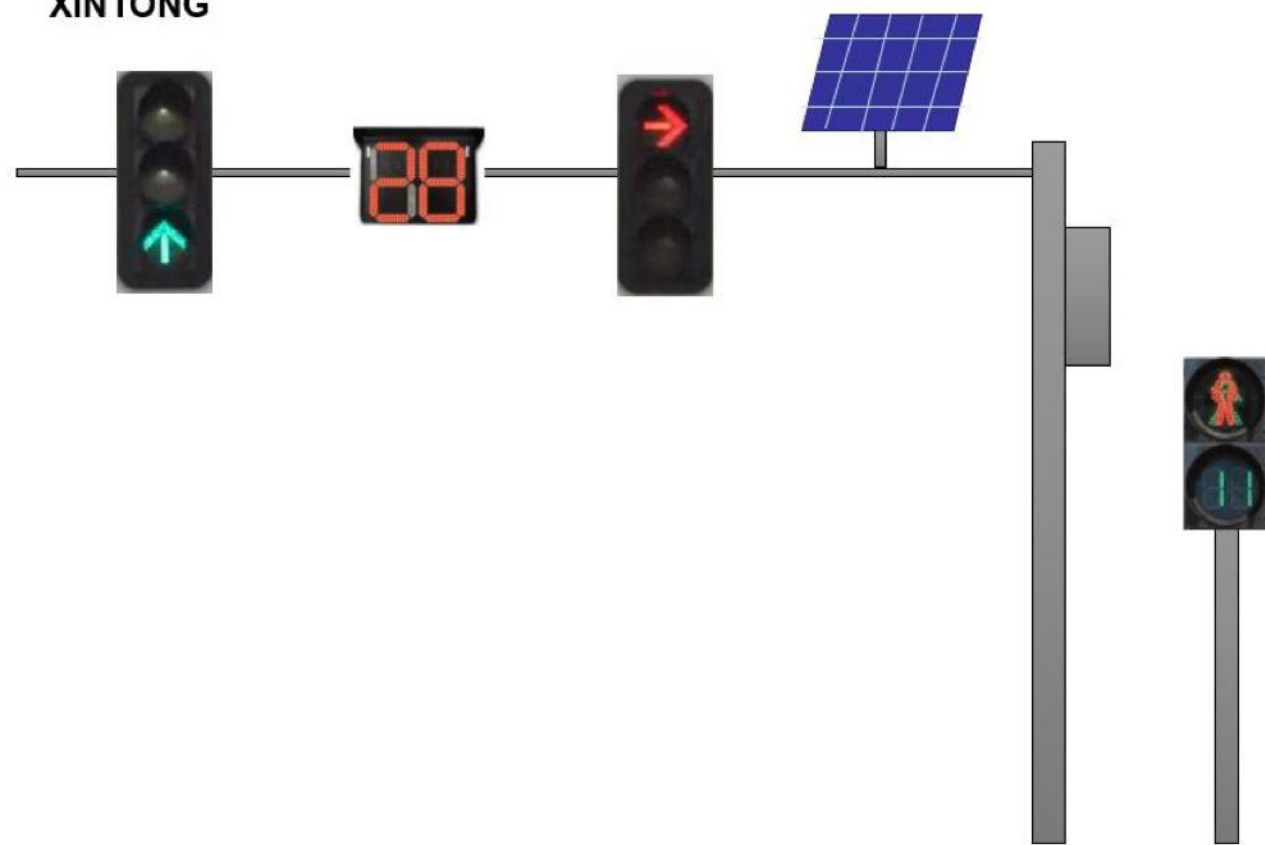


XINTONG Traffic Light Solution – one pole system set price

No.	Equipment	Model	Specification	Qty	Unit
1	Straight Arrow Traffic Light	FX303-1S	Ø300mm, Makrolon	1	Set
2	Countdown timer	DJS800-III	Ø600*800mm, Makrolon with timer build in	1	Set
3	Right turn arrow traffic light	FX303-1S	Ø300mm, Makrolon	1	Set
4	Pedestrian Traffic Light	RX303-3S	Ø300mm, Makrolon, Dynamic, with timer, including hoop	1	Set
5	Solar panel	CRIL-240W	240W Mono solar panel	1	Set
6	Solar battery	XT-120AH/12V	120AH/12V Gel battery *2 pcs for one pole system	2	Set
7	Solar charge controller	XT-S20A/24V	20A/24V Solar charge controller	1	Set
8	Traffic Light Controller	XT-TYN-22L	16 phase solar controller, one main three subsidiary	1	Unit
9	Equipment Box	XT-SEP	500×300×220mm, stainless steel	1	Unit
10	Battery box	HL-9	PVC battery box to place gel battery	1	Set
11	T-shape Traffic Light Pole	6.8m-6m	L-shape octagonal pole; hot-dip galvanized steel Q235 Pole: (180-240)×5×6800; Flange: Ø450×16; Cantilever: (100-180)×4×6000; Cantilever: 320×320×14; Anchor bolt: 6-M20-Ø350-L1000	1	Set
12	I-shape Traffic Light Pole	3.5m	I-shape conical pole; hot-dip galvanized steel Q235 Pole: 89×3×3500; Flange: Ø300×10; Anchor bolt: 4-M24-Ø350-L1150	1	Unit
13	Cable	RVV4×1.5mm ²	Cable for solar traffic light	100	Meter

XINTONG



XINTONG

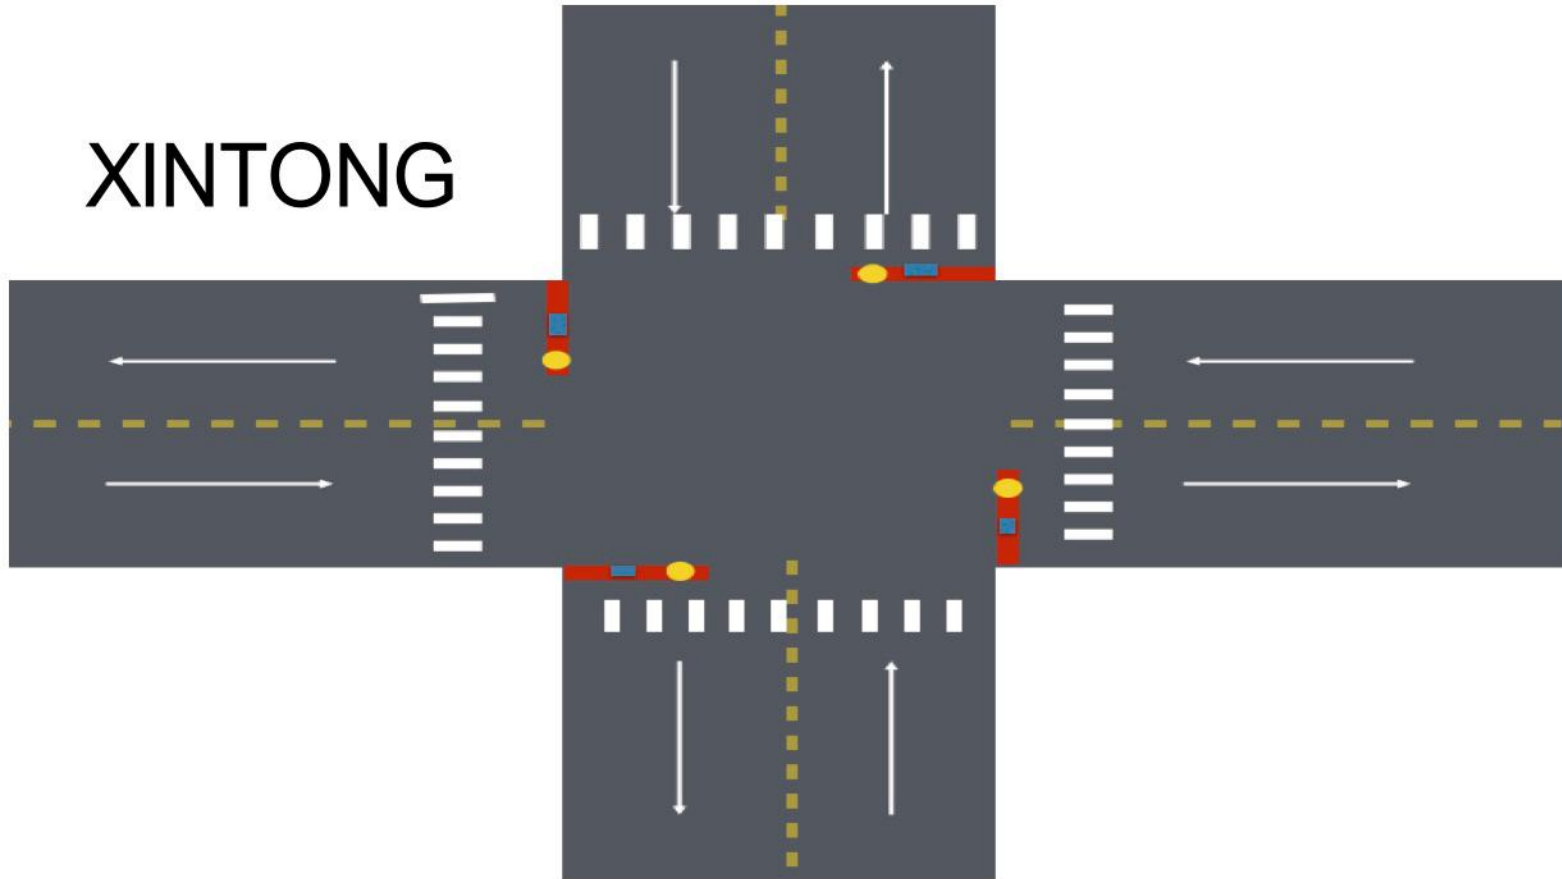


XINTONG




XINTONG Solar Traffic Light Solution – One lane for each direction full screen light + countdown timer
One pole set system price

No.	Equipemnt	Model	Specification	Qty	Unit
1	Full-ball Traffic Light	JD303-1S	Ø300mm, Makrolon	1	Set
2	Countdown timer	DJS300-1S	Ø300mm, Makrolon2	1	Unit
3	Pedestrian Traffic Light	RX303-3S	Ø300mm, Makrolon, Dynamic, with timer, including hoop	1	Set
4	Traffic Light Controller	XT-TYN-22L	16 phase solar controller, one main three subsidiary	1	Unit
5	Equipment Box	XT-SEP	500×300×220mm, stainless steel	1	Unit
6	Solar panel	CRIL-250W	250W Mono solar panel *1 for each direction system	1	Unit
7	Solar battery	XT-Battery	250AH *1 Gel battery *1 for each direction system	1	Unit
8	Charge protector	XT-Controller	20A/12V/24V controller *1 for each direction system	1	Unit
9	Battery box	HL-9	PVC Battery box to place 250AH Gel battery	1	Unit
10	L-shape Traffic Light Pole	6.8m-3m	L-shape octagonal pole; hot-dip galvanized steel Q235 Pole: (160-220)×5×68000; Flange: Ø450×16; Cantilever: (100-140)×3×3000; Cantilever: 300×300×12; Anchor bolt: 6-M20-Ø350-L1000	1	Set
11	I-shape Traffic Light Pole	3.5m	I-shape conical pole; hot-dip galvanized steel Q235 Pole: 89×3×3500; Flange: Ø300×10; Anchor bolt: 4-M20-Ø220-L600	1	Unit
12	Cable	RVV4×1.5mm ²	Cable for solar traffic light	100	Meter

XINTONG

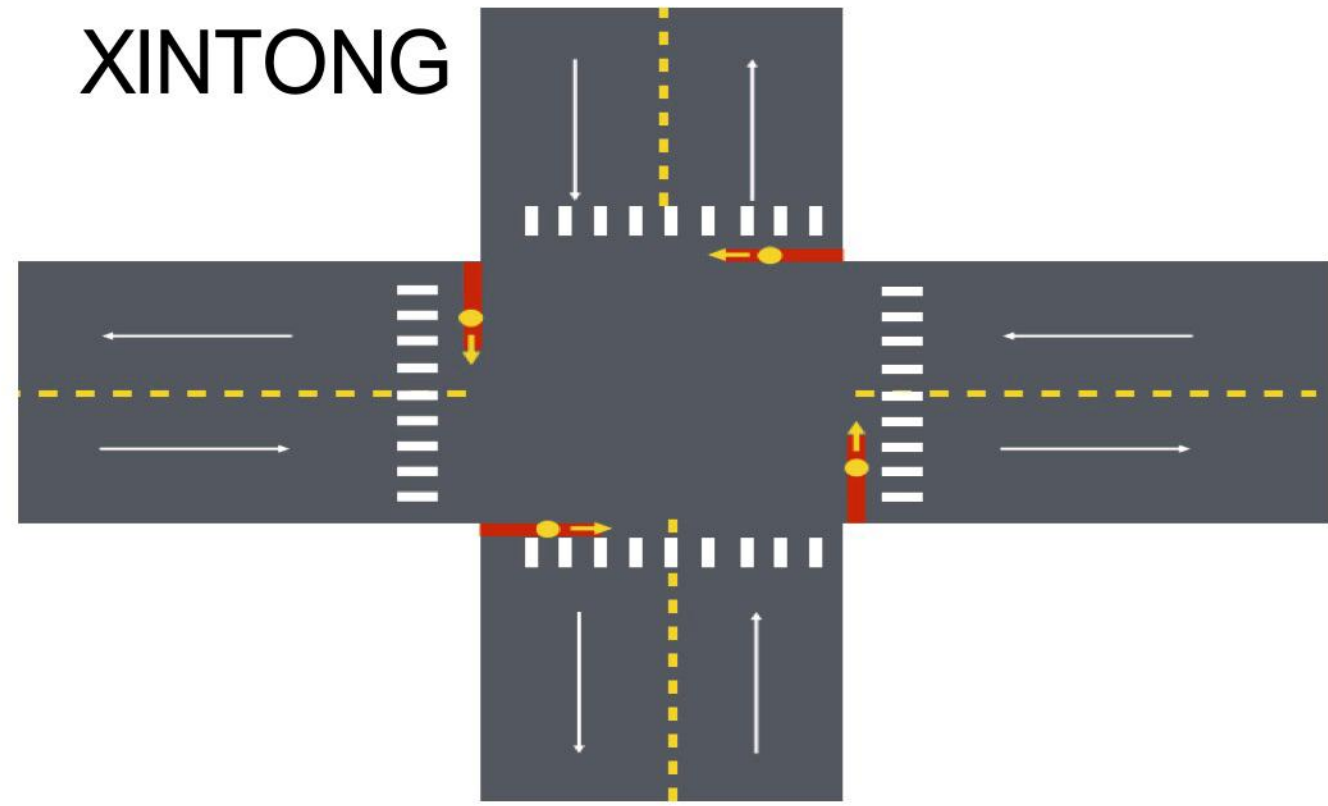

XINTONG

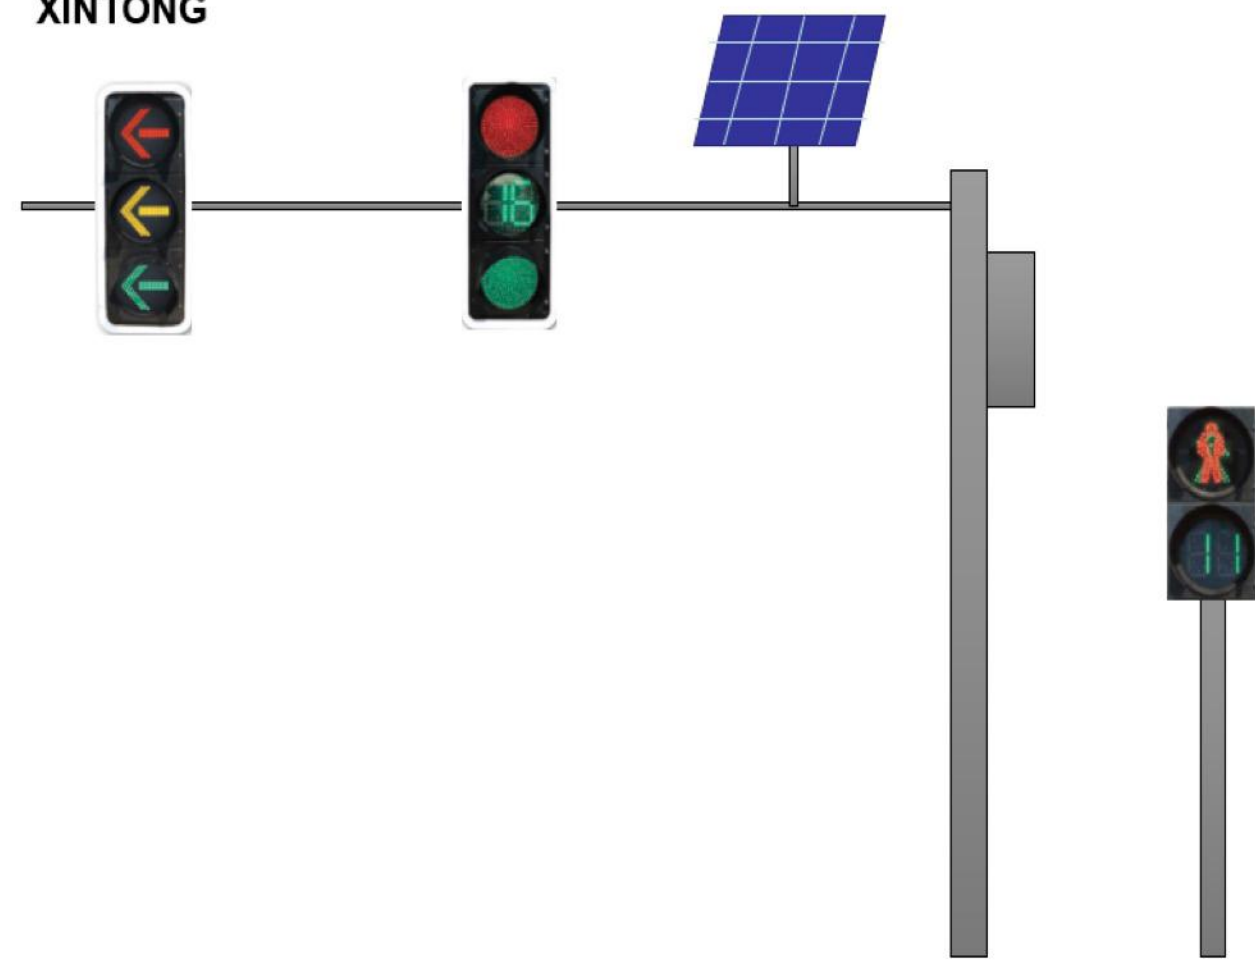


XINTONG Traffic Light Solution – one pole system set price

No.	Equipmentt	Model		Qty	Unit
1	Arrow Traffic Light	FX403-1S	Ø400mm, Makrolon	1	Set
2	Full-ball Traffic Light with timer	JD303-1S	Ø300mm, Makrolon with timer build in	1	Set
3	Pedestrian Traffic Light	RX303-3S	Ø300mm, Makrolon, Dynamic, with timer, including hoop	1	Set
4	Solar panel	CRIL-280W	280W Mono solar panel	1	Set
5	Solar battery	XT-150AH/12V	150AH/12V Gel battery *2 pcs for one pole system	2	Set
6	Solar charge controller	XT-S20A/24V	20A/24V Solar charge controller	1	Set
7	Traffic Light Controller	XT-TYN-22L	16 phase solar controller, one main three subsidiary	1	Unit
8	Equipment Box	XT-SEP	500×300×220mm, stainless steel	1	Unit
9	Battery box	HL-9	PVC battery box to place gel battery	1	Set
10	T-shape Traffic Light Pole	6.8m-6m	L-shape octagonal pole; hot-dip galvanized steel Q235 Pole: (180-240)×5×6800; Flange: Ø450×16; Cantilever: (100-180)×4×6000; Cantilever: 320×320×14 ; Anchor bolt: 6-M20-Ø350-L1000	1	Set
11	I-shape Traffic Light Pole	3.5m	I-shape conical pole; hot-dip galvanized steel Q235 Pole: 89×3×3500; Flange: Ø300×10; Anchor bolt: 4-M24-Ø350-L1150	1	Unit
12	Cable	RVV4×1.5mm ²	Cable for solar traffic light	100	Meter

XINTONG



XINTONG

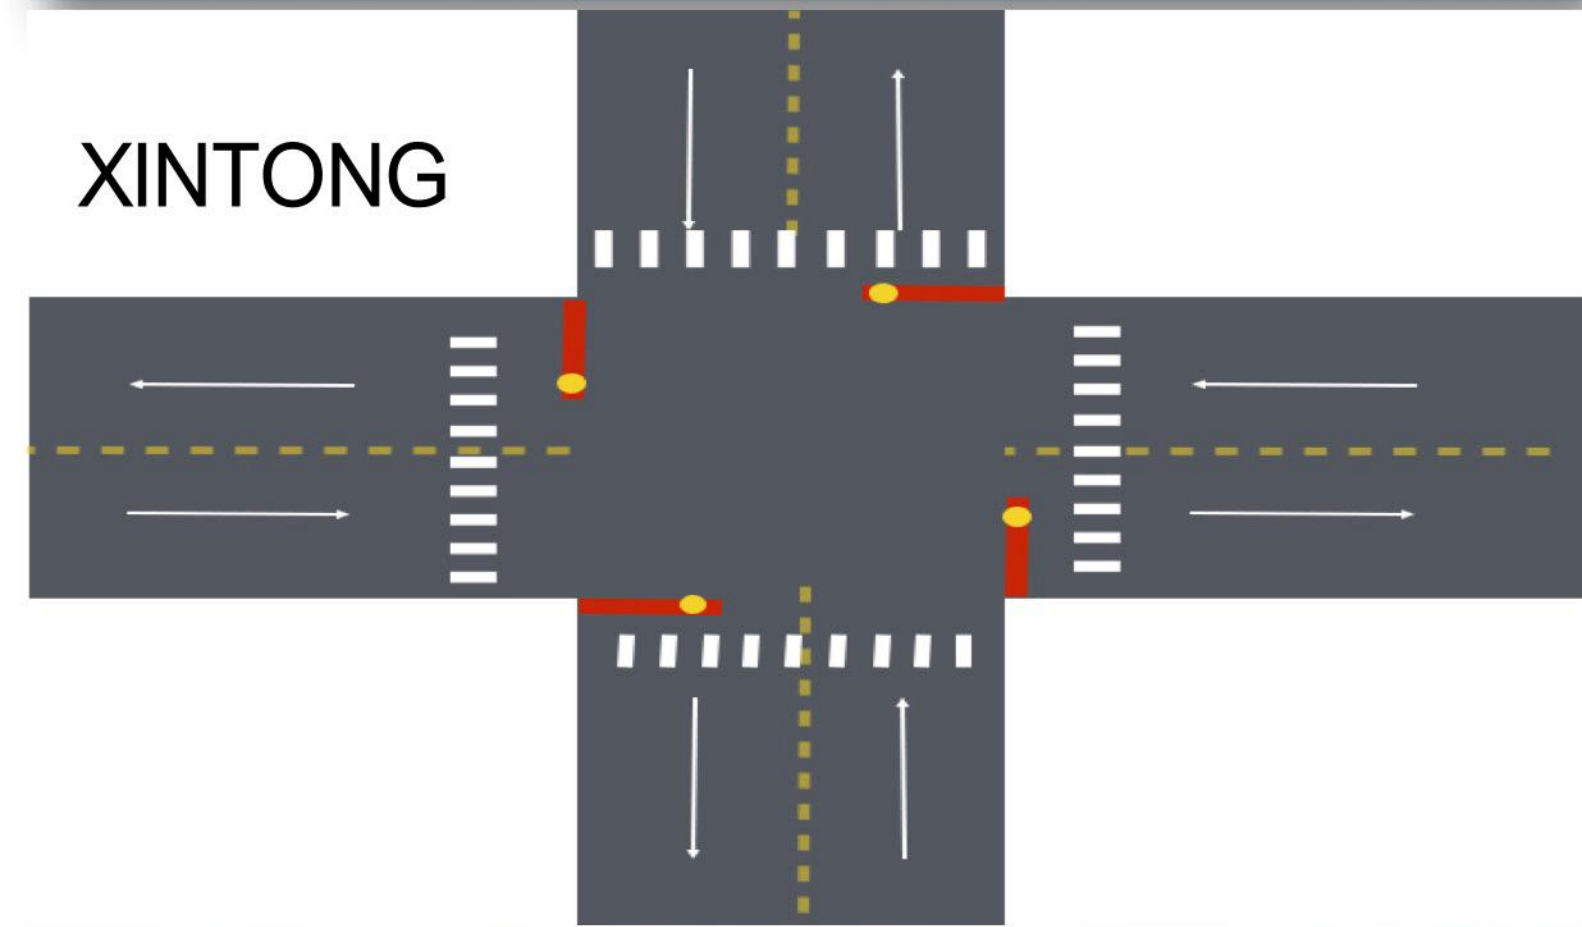



XINTONG



**XINTONG Solar Traffic Light Solution – One lane for each direction full screen light
One pole set system price**

No.	Equipemnt	Model	Specification	Qty	Unit
1	Full-ball Traffic Light	JD303-1S	Ø300mm, Makrolon	1	Set
2	Pedestrian Traffic Light	RX303-3S	Ø300mm, Makrolon, Dynamic, with timer, including hoop	1	Set
3	Traffic Light Controller	XT-TYN-22L	16 phase solar controller, one main three subsidiary	1	Unit
4	Equipment Box	XT-SEP	500×300×220mm, stainless steel	1	Unit
5	Solar panel	CRIL-150W	150W Mono solar panel *1 for each direction system	1	Unit
6	Solar battery	XT-Battery	150AH *1 Gel battery *1 for each direction system	1	Unit
7	Charge protector	XT-Controller	20A/12V/24V controller *1 for each direction system	1	Unit
8	Battery box	HL-9	PVC Battery box to place 150AH Gel battery	1	Unit
9	L-shape Traffic Light Pole	6.8m-3m	L-shape octagonal pole; hot-dip galvanized steel Q235 Pole: (160-220)×5×68000; Flange: Ø450×16; Cantilever: (100-140)×3×3000; Cantilever: 300×300×12; Anchor bolt: 6-M20-Ø350-L1000	1	Set
10	I-shape Traffic Light Pole	3.5m	I-shape conical pole; hot-dip galvanized steel Q235 Pole: 89×3×3500; Flange: Ø300×10; Anchor bolt: 4-M20-Ø220-L600	1	Unit
11	Cable	RVV4×1.5mm ²	Cable for solar traffic light	100	Meter

XINTONG

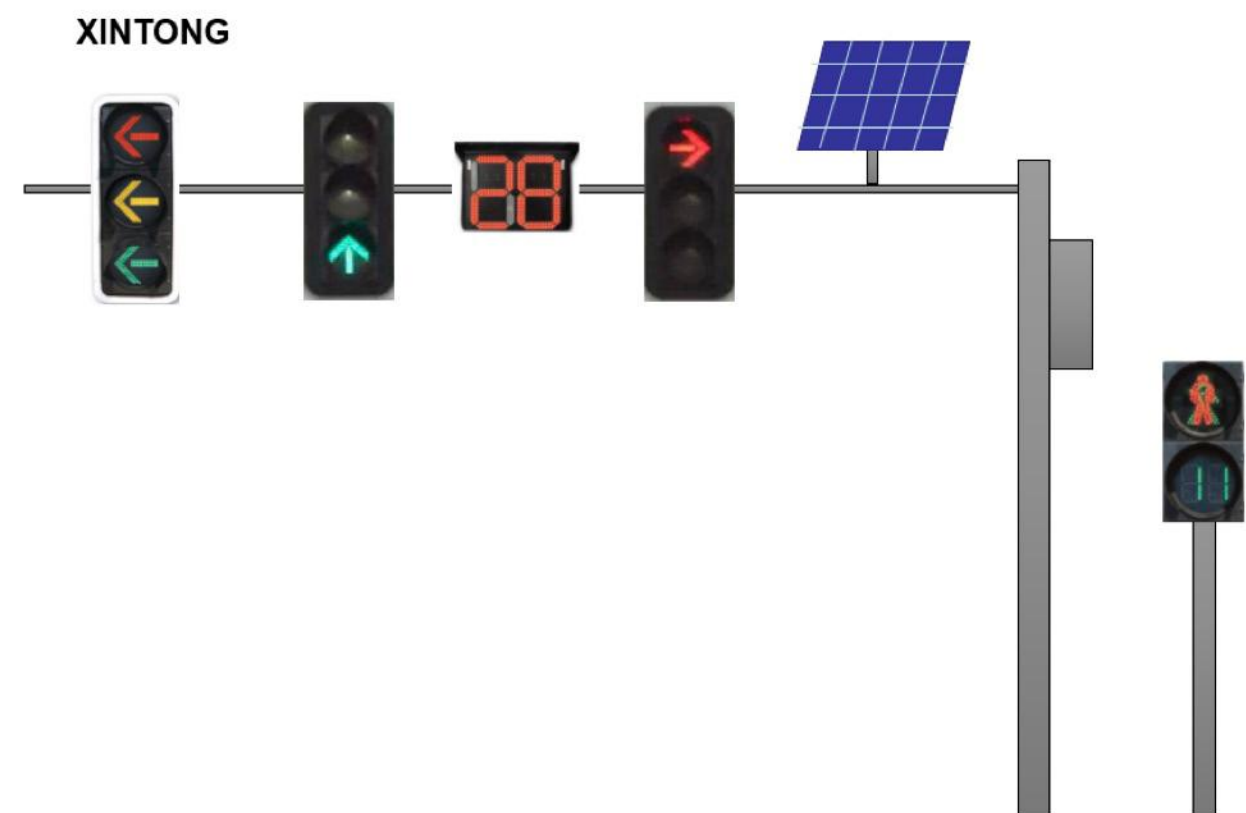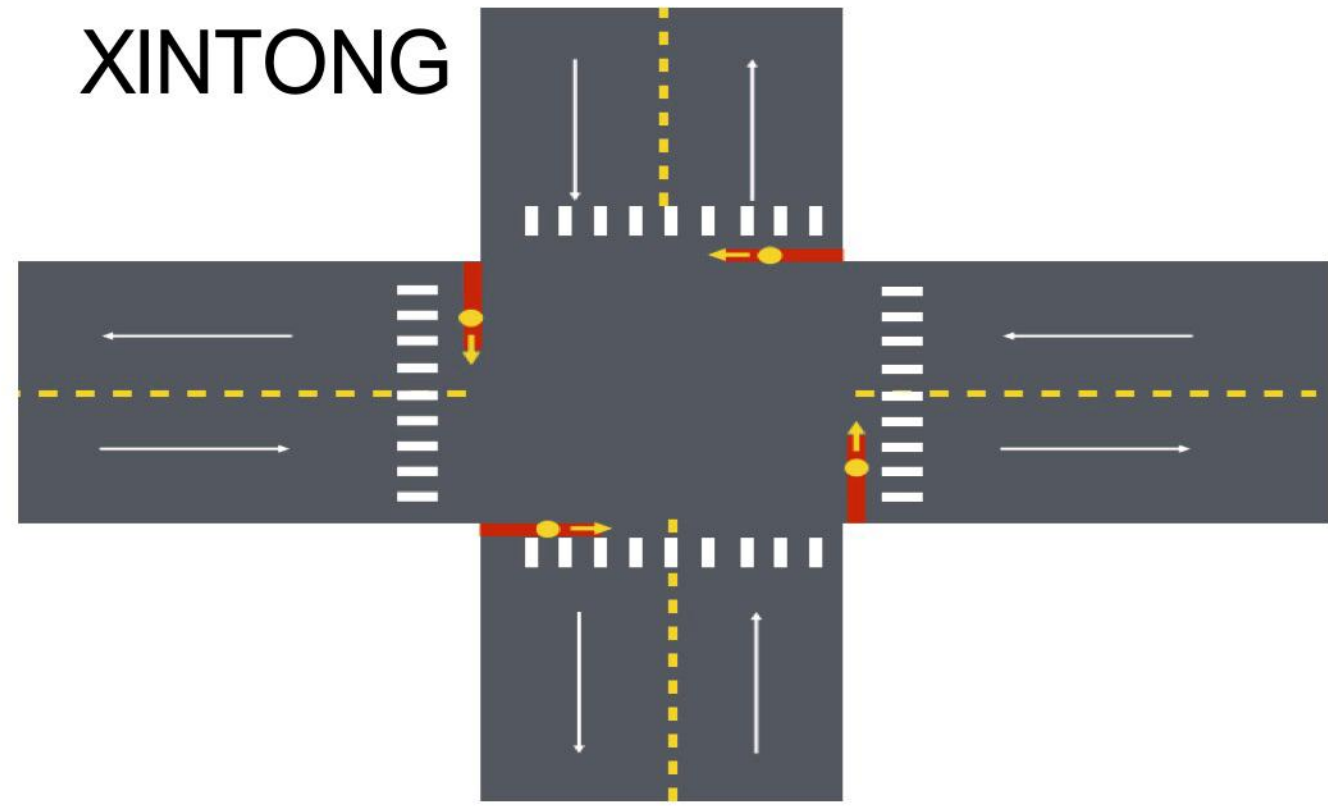

XINTONG Traffic Light Solution – one pole system set price

No.	Equipmentt	Model	Specification	Qty	Unit
1	Straight Arrow Traffic Light	FX403-1S	Ø400mm, Makrolon	1	Set
2	Countdown timer	DJS800-III	Ø600*800mm, Makrolon with timer build in	1	Set
3	Left turn arrow traffic light	FX403-1S	Ø400mm, Makrolon	1	Set
4	Right turn arrow traffic light	FX403-1S	Ø400mm, Makrolon	1	Set
5	Pedestrian Traffic Light	RX303-3S	Ø300mm, Makrolon, Dynamic, with timer, including hoop	1	Set
6	Solar panel	CRIL-280W	280W Mono solar panel	1	Set
7	Solar battery	XT-150AH/12V	150AH/12V Gel battery *2 pcs for one pole system	2	Set
8	Solar charge controller	XT-S20A/24V	20A/24V Solar charge controller	1	Set
9	Traffic Light Controller	XT-TYN-22L	16 phase solar controller, one main three subsidiary	1	Unit
10	Equipment Box	XT-SEP	500×300×220mm, stainless steel	1	Unit
11	Battery box	HL-9	PVC battery box to place gel battery	1	Set
12	T-shape Traffic Light Pole	6.8m-6m	L-shape octagonal pole; hot-dip galvanized steel Q235 Pole: (180-240)×5×6800; Flange: Ø450×16; Cantilever: (100-180)×4×6000; Cantilever: 320×320×14; Anchor bolt: 6-M20-Ø350-L1000	1	Set
13	I-shape Traffic Light Pole	3.5m	I-shape conical pole; hot-dip galvanized steel Q235 Pole: 89×3×3500; Flange: Ø300×10; Anchor bolt: 4-M24-Ø350-L1150	1	Unit
14	Cable	RVV4×1.5mm ²	Cable for solar traffic light	100	Meter

Remark

1. Warranty : 1 year for whole system
2. Above is one pole system cost , and we provided crossing intersection solution ,it means per set price *4 ; if T junction it means per set price *3 ; all based on your intersection condition
3. Production time : 10-20 working days after get deposit
4. Payment method : 30% T/T in advance and 70% T/T before shipment

Welcome to visit our factory